

Relay Selection in Multihop Wireless Network

¹ Shraddha Patil, ²Pankaj Chandre

¹PG Scholar, ²Assistant Professor

¹Dept. of Computer Engineering, Flora Institute of Technology, Pune, India

Abstract - We will consider the two important aspects of the OR. First Candidate node selection and second Prioritization of the selected nodes in the candidate set. In proposed work we consider the Leftover energy of the nodes as well as the security parameter of the node by adding a security value to each node at time of deployment of the nodes. We use the secure value and the leftover energy of the node for the candidate selection and the prioritization of the selected relays. Lastly compare proposed system with existing system to demonstrate the results.

Index Terms - OR, WSN, ExOR protocol, Opportunistic routing, Trustworthiness, Leftover Energy.

I. INTRODUCTION

Traditional wireless sensor networks were considered as point to point connected nodes by neglecting the broadcast nature of wireless network. Currently opportunistic routing has attracted lot of attention from the researchers in the area of networking. In OR major concern is the candidate selection at the runtime to forward the packet to the destination. Many of the OR protocol has concentrated on the research in the relay selection and neglected the security parameter during selection. Existing work proposed the relay node selection algorithm based on the Leftover energy of the node. Wireless sensor network (WSN) are everywhere nowadays. In WSNs, thousands of physically embedded sensor nodes are distributed and more modern networks and they used in most applications, it is not possible to change battery each and every time whenever it degrades its value. Energy efficiency for transmitting data, the existing energy-efficient routing protocols are used to find the minimal energy path between a source and a destination that means a sink to achieve optimal energy consumption [3]–[5].

II. RELATED WORK

ETX is used by ExOR [1] extremely opportunistic algorithm to select a candidate forwarder set. It can provide better performances over traditional routing protocols [5]. But there are still some problems in ExOR. After a transmission, all the nodes in the candidate set have to wait for the forwarding of the nodes with higher priority in order. It is not an efficient way to do the spatial reuse. Moreover multicast is not implemented.

MORE [2] randomly mixes packets before forwarding them. This action of forwarding of packets randomness ensures the routers that overhear the same transmission will not forward the same packets. In other words, MORE introduces network coding to OR. MORE support both unicast and multicast. Previously we are using MORE to forward an elected packet to choose relay node. Using ETX in MORE is not suitable because MORE is a versatile scheme, unlike ExOR which is an unfair scheme to use the nodes based on their priorities. It does not need ETX to select candidate nodes with priorities, and treat them based on the different priorities. Moreover, it does not introduce error control and rate control schemes.

III. PROPOSED SYSTEM

A. Structure

In proposed system we will implement the candidate selection using Leftover energy of the nodes and the trust value assigned / calculated by the nodes in the network. We have kept the existing system of Leftover energy based candidate selection. In our proposed work our aim is to achieve the better results for candidate selection with the improved packet delivery ratio and minimum end to end delay. It consists of main phases:

- TBEER selection scheme
- Phase-2 or Leftover energy of nodes
- Phase-3 or Trustworthiness of nodes
- Phase-4 or Candidate selection
- Phase-5 or Prioritization of Relays

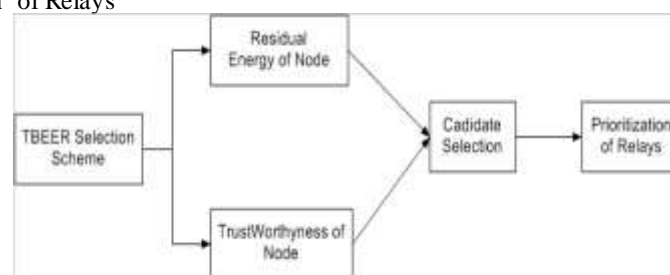


Fig1. Architectural Block Diagram

B. TBEER selection scheme

Trust Based Energy Efficient Relay Selection scheme, we are selecting node on trust bas and considering efficiency of energy per node.

C. Leftover Energy of nodes

It is a remaining energy. It is used to describe as a Leftover energy is the energy which is remaining of something when most of the energy is gone. Energy remains after transmitting the packet and same packet after receiving.

D. Trustworthiness of Nodes

The name defines worthy of trust. Trustworthy describes something in which you have believe. It is completely reliable. Select the trusted node to whom we can send next packet.

E. Candidate Selection

Select the candidate after calculating Leftover energy and trust parameter of the node.

F. Prioritization of Relays

From the selected candidate again select one node which is trusted and energy efficient from all other. It should be selected on the base of priority.

IV. FLOWCHART

Below is the flowchart of proposed model

V. SELECTION OF RELAY NODE

A. Leftover Energy of Nodes

Every node in the network calculates the energy value of each of its neighboring node. If a node has sufficient energy to receive and send the packet to the next hop then only the packet will be forwarded to the next hop. Each node computes the energy of the other nodes using following steps.

1. Calculate the amount of energy consumed by node C for receiving and forwarding packet.

$$2. ER(c) = \alpha * PR \quad (1)$$

Here ER= is the amount of energy consumed by node C to receive all incoming packet.

α = is the configurable parameter (amount of energy required to receive a packet).

PR= No. of packets received.

3. $ES(c) = \beta * PS.$ (2)

Here Es= is the amount of energy consumed by node C to send all outgoing packet.

β = is the configurable parameter.(amount of energy required to send a packet to next hop).

Ps= No. of packets sent.

4. $E_{Remaining}(c) = E_{Total}(c) - (ES(c)+ER(c))$ (3)

Using above steps we calculate the remaining energy of the nodes in the network. The nodes in the network can take part in candidate selection only if they have sufficient energy to transmit the packet to the next hop.

B. Trustworthiness of node

Every node in the network calculates the trustworthiness of the neighboring node using the following equation. Trust value of a node is calculated by using following equation,

$$Ti(ji,n) = Rji(n) / Fji(n) \quad (4)$$

$Ti(j,n)$ = Trust value of node i assigned/calculated by node j during nth topology cycle. Where $Rji(n)$ and $Fji(n)$ are the number of packet that have been received by j and forwarded from i at time t respectively, and $0 \leq T(j, t) \leq 1$.


Trust value of a node is updated after every topology change using following mathematical equation.

$$Ti(j, n) = \alpha . Ti(j, n-1) + (1-\alpha) . Ti(j, n) \quad (5)$$

Where, $Ti(j,n)$ is node i's trust value measured during nth topology updating cycle. $0 < \alpha < 1$ is a weighting factor used to tradeoff between current measurement and previous estimation. The calculated trust value is then used for the candidate selection and prioritization of the relays.

C. Candidate Selection Algorithm

We a new algorithm for the candidate selection in multi-hop wireless network. The proposed candidate selection algorithm based on the Leftover energy of the nodes in the network and thrust value of the nodes in the network. Proposed candidate selection algorithm performs the candidate selection in efficient and effective way to achieve the better protocol performance.

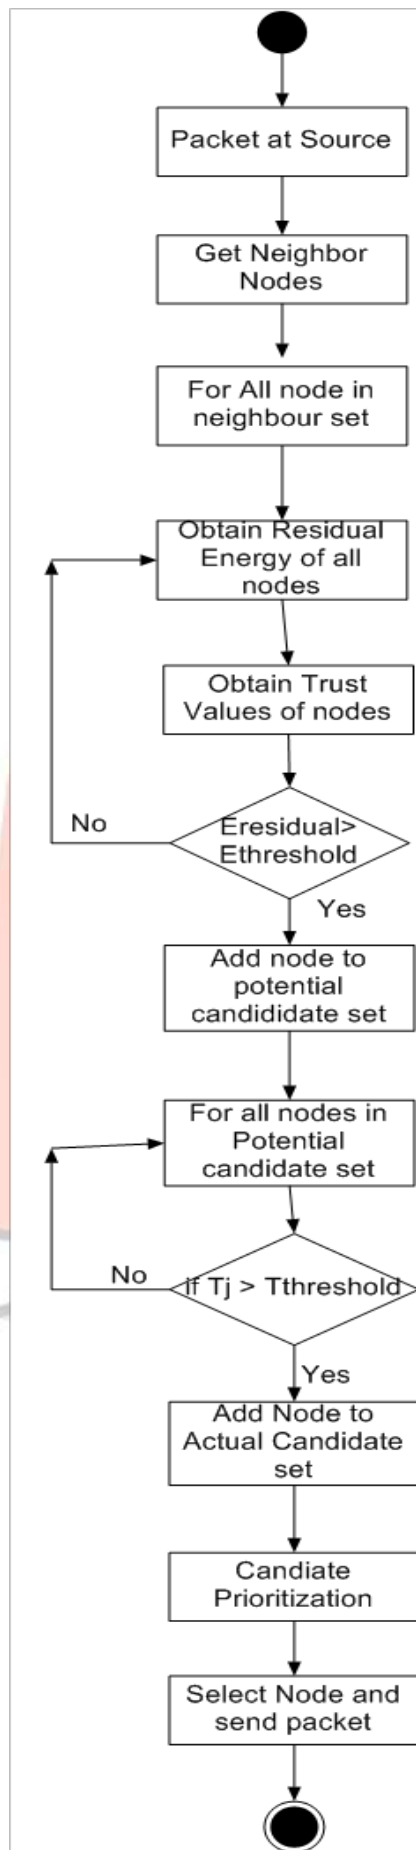

SendRecive(P)
Begin

```

If(P.dest == MyID)
ReceivePacket(P)
Else
// Candidate Selection
NB[] = Get_Neighbor();
GetEnergy(NB);
GetTrust(NB);
//Generate potential candidate set
Wix,d =  $\phi$ 
For each node j  $\in$  NB
  If j  $\neq$  x & ERemaining(j) > EThreshold then
    Wix,d = Wix,d  $\cup$  {j}
  End if.
End for
// generate actual candidate set Cix,d from Wix,d
Cix,d =  $\phi$ 
While no new candidate is added to Cix,d
For each candidate in Wix,d do
  If j  $\in$  Wix,d and Tj > TThreshold then
    Cix,d = Cix,d  $\cup$  { j }
  End if
End for
End While
//Candidate selection end
// Prioritization
Sort Node in Cix,d according to decreasing values of their trust.
// Prioritization
Add sorted Cix,d to the packet.
Send (P);
End else
End begin

```

Basically Leftover energy optimal energy trustworthiness parameter and priority will use to select the node In addition, the transmitted data can be naturally classified into two categories:

1) The former is the collected data of its own; and 2) the latter is the relay data from other nodes.

VI RESULT



Fig2. Send packet source to destination in GUI

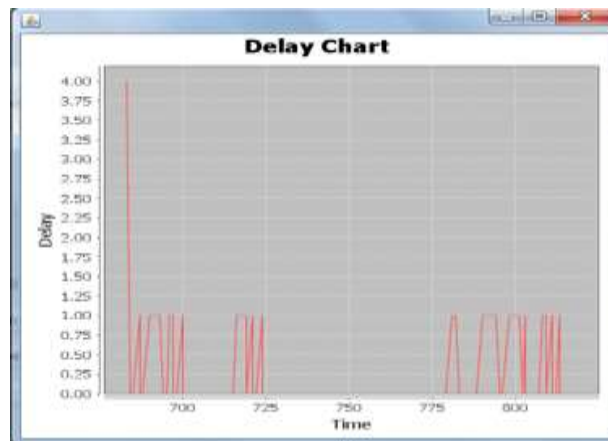


Fig.3 Delay Chart

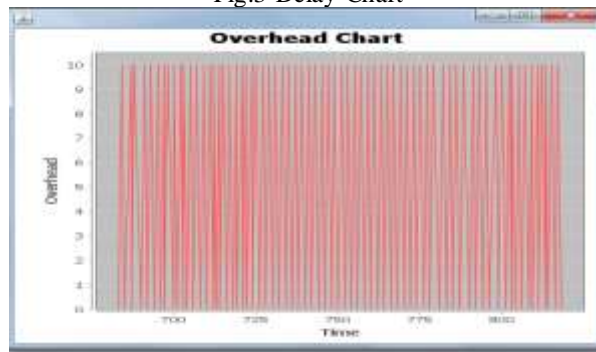


Fig.4 Overhead Chart



Fig. 5 Packet Delivery Ratio

VII CONCLUSION

Wireless sensor network offers a wide range of applications in areas such as traffic monitoring, medical care, inhospitable terrain, robotic exploration, and agriculture surveillance. In this paper we will implement the candidate selection using Leftover energy of the nodes and the trust value calculated by the nodes in the network. We have kept the existing system of Leftover energy based candidate selection. In our proposed work our aim is to achieve the better results for candidate selection with the improved packet delivery ratio and minimum end-to-end delay.

ACKNOWLEDGMENT

I am thankful to the Department of Computer Engineering for providing me with the best of the facilities. I would also like to thank my husband Mr. Sangram Patil who encouraged me and created a healthy environment for me to learn in the best possible way.

REFERENCES

- [1] Juan Luo, Member, IEEE, Jinyu Hu, Di Wu, Member, IEEE, and Renfa Li, Senior Member, IEEE, "Opportunistic Routing Algorithm for Relay Node Selection in Wireless Sensor Networks", IEEE TRANSACTIONS ON INDUSTRIAL INFORMATICS, VOL. 11, NO. 1, FEBRUARY 2015
- [2] L. Cheng, J. Niu, J. Cao, S. Das, and Y. Gu, "Qos aware geographic opportunistic routing in wireless sensor networks," IEEE Trans. Parallel Distrib. Syst., vol. 25, no. 7, pp. 1864–1875, Jul. 2014.
- [3] D. Zhang, G. Li, K. Zheng, X. Ming, and Z.-H. Pan, "An energy-balanced routing method based on forward-aware factor for wireless sensor networks," IEEE Trans. Ind. Informat., vol. 10, no. 1, pp. 766–773, Feb. 2014.
- [4] D. Hoang, P. Yadav, R. Kumar, and S. Panda, "Real-time implementation of a harmony search algorithm-based clustering protocol for energy efficient wireless sensor networks," IEEE Trans. Ind. Informat., vol. 10, no. 1, pp. 774–783, Feb. 2014.

- [5] D. Bruckner, C. Picus, R. Velik, W. Herzner, and G. Zucker, "Hierarchical semantic processing architecture for smart sensors in surveillance networks," *IEEE Trans. Ind. Informat.*, vol. 8, no. 2, pp. 291–301, May 2012.
- [6] Behnad and S. Nader-Esfahani, "On the statistics of MFR routing in one-dimensional ad hoc networks," *IEEE Trans. Veh. Technol.*, vol. 60, no. 7, pp. 3276–3289, Sep. 2011.
- [7] F. Ren, J. Zhang, T. He, C. Lin, and S. K. Ren, "EBRP: Energybalanced routing protocol for data gathering in wireless sensor networks," *IEEE Trans. Parallel Distrib. Syst.*, vol. 22, no. 12, pp. 2108–2125, Dec. 2011.
- [8] G. J. Pottie and W. J. Kaiser, "Wireless integrated network sensors," *Commun. Assoc. Comput. Mach.*, vol. 43, no. 5, pp. 51–58, 2000.

